

MFA0248

Blower for Blended O₂ & Transport care

A specific blower's architecture with **patented motor cooling system fully independent** from the air inlet flow. This blower offers a **special housing** for vibration and noise reduction designed for **transportable application** such as **emergency care**.



New product





Available only on specific request

designed for high BPM applications


PERFORMANCES

ΔP max @24V		70 hPa	fully closed
Q max @24V		320 l/mn	fully opened
Typical w/p @30 l/mn		P = 11.3 (W)	@30 hPa
		P = 21.0 (W)	@60 hPa
LifeTime (L10)		> 40 000 hours*	
Type		Casing integration	

* LifeTime expectancy based on standard operating conditions


 Dynamic transient time*	< 97 ms	@3A max
	< 92 ms	@6A max
	< 86 ms	@10A max
* from 5 to 60 hPa @30 l/mn		
 Noise Level*	< 52 dBa	@30 hPa
	* with Blower inlet @1m	

* with Blower inlet @1m

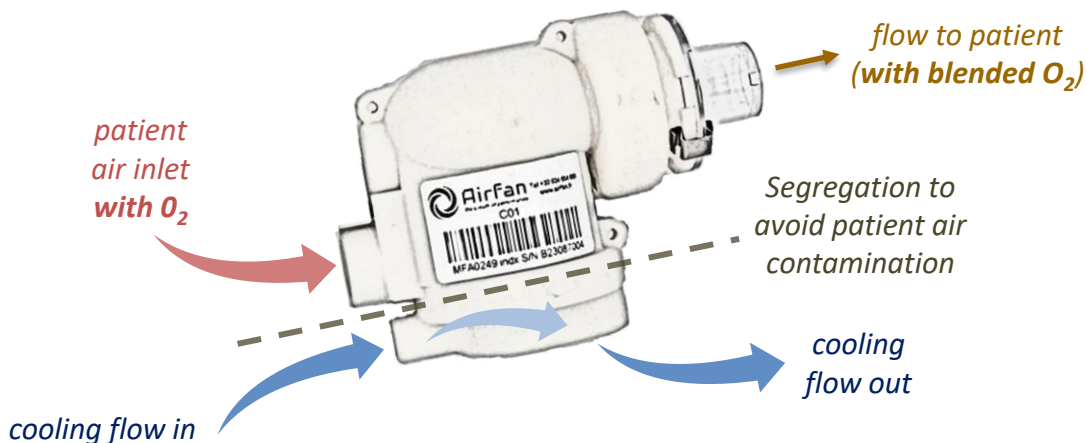

TECHNICAL DATA


Voltage supply	24 VDC (nom) 28 VDC (max)
Motor type	Brushless with Hall-effect sensors
Dimensions (casing)	125 x 91 x Ø64 mm (4.9x3.6xØ2.5 in)
Weight	0.23 kg (~ 0.51 Lb)
Integration	works in any position/orientation
Temperature	-20 to +50°C ambient
Humidity	0 to 95% RH non condensing
Atmospheric pressure	700 to 1100 hPa
Oxygen compatibility	100% O2 compatible

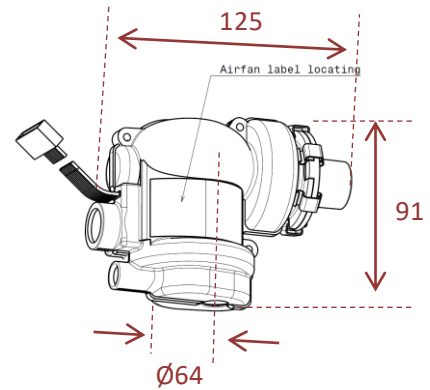


COMPRESSOR MAP

Static ΔP vs Airflow at Constant PWM and Motor Voltage
 PWM = Pulse Width Modulation

MFA0248 Turbine

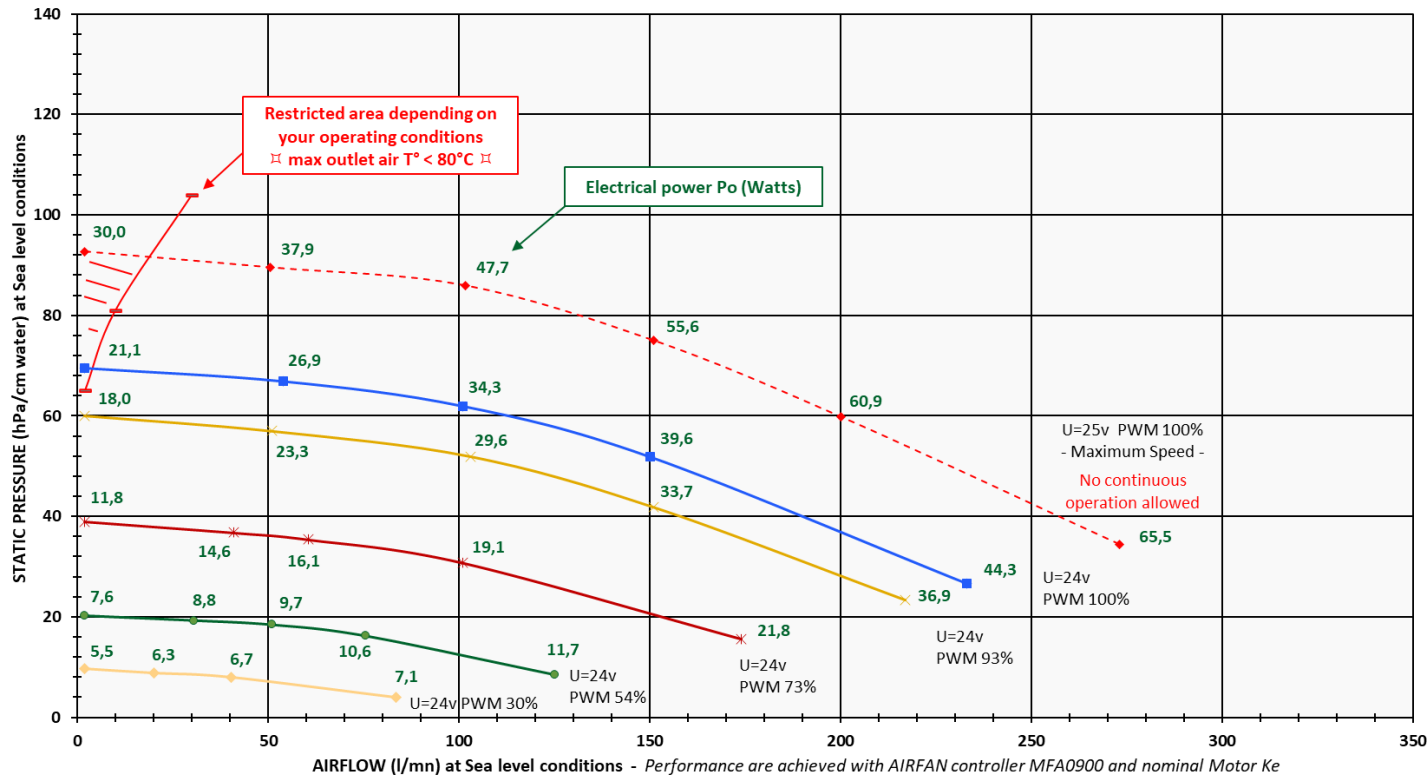

CUSTOMIZATION



- Outlet port** male or female connector (22Ø ISO5356-1) or additional auxiliary ports

Outlet port



- Wire Length** 150 or custom



- Custom label**



ASK FOR YOUR CUSTOMIZATION

