


MFA0295

Blower for Performance & Reliability

AIRFAN blower architecture with unique soundproof housing.

Perfectly suited for implementation in ventilators dedicated to Acute, Sub-Acute and Home Care. The **MFA0295** is derived from the **MFA0290** without an inner motor cooling system for Oxygen management**.

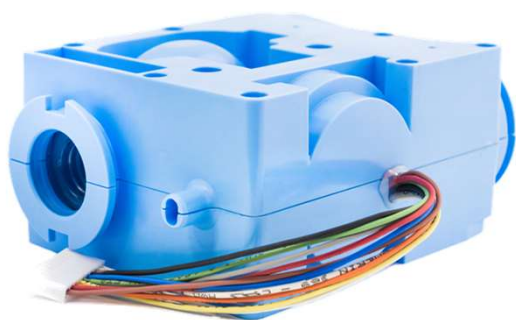

PERFORMANCES


ΔP max @24V		77 hPa	fully closed
Q max @24V		290 l/mn	fully opened
Typical w/p @30 l/mn		P = 10.5 (W)	@30 hPa
		P = 21.5 (W)	@60 hPa
LifeTime (L10)		> 25 000 hours*	
Type		Casing integration	

* LifeTime expectancy based on standard operating conditions

 Dynamic transient time*	< 95 ms	@3A max
	< 88 ms	@6A max
	< 84 ms	@10A max
* from 5 to 60 hPa @30 l/mn		
 Noise Level*	< 29 dBa	@10 hPa
	< 41 dBa	@30 hPa
	< 48 dBa	@60 hPa

* with Blower inlet @1m

air inlet
with O₂

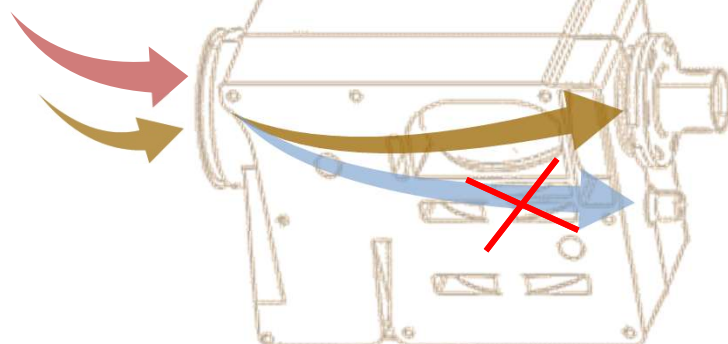


flow to patient
with blended O₂

no cooling

** Oxygen compatibility and lifetime depending on customer operating conditions

TECHNICAL DATA

Voltage supply	24 VDC (nom) 28 VDC (max)
Motor type	Brushless with Hall-effect sensors
Dimensions (casing)	130 x 100 x 61 mm (5.3 x 3.9 x 2.4 in)
Weight	0.45 kg (~ 1.00 Lb)
Integration	works in any position/orientation
Temperature	+10 to +50°C ambient
Humidity	15 to 95% RH non-condensing
Atmospheric pressure	660 to 1060 hPa
Oxygen compatibility	depending on customer operating conditions

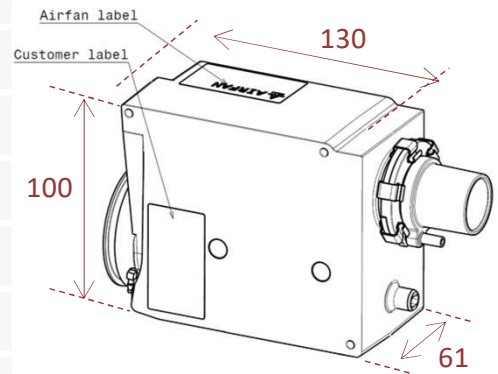


COMPRESSOR MAP


MFA0295 Turbine

Static ΔP vs Airflow at Constant PWM and Motor Voltage

PWM = Pulse Width Modulation

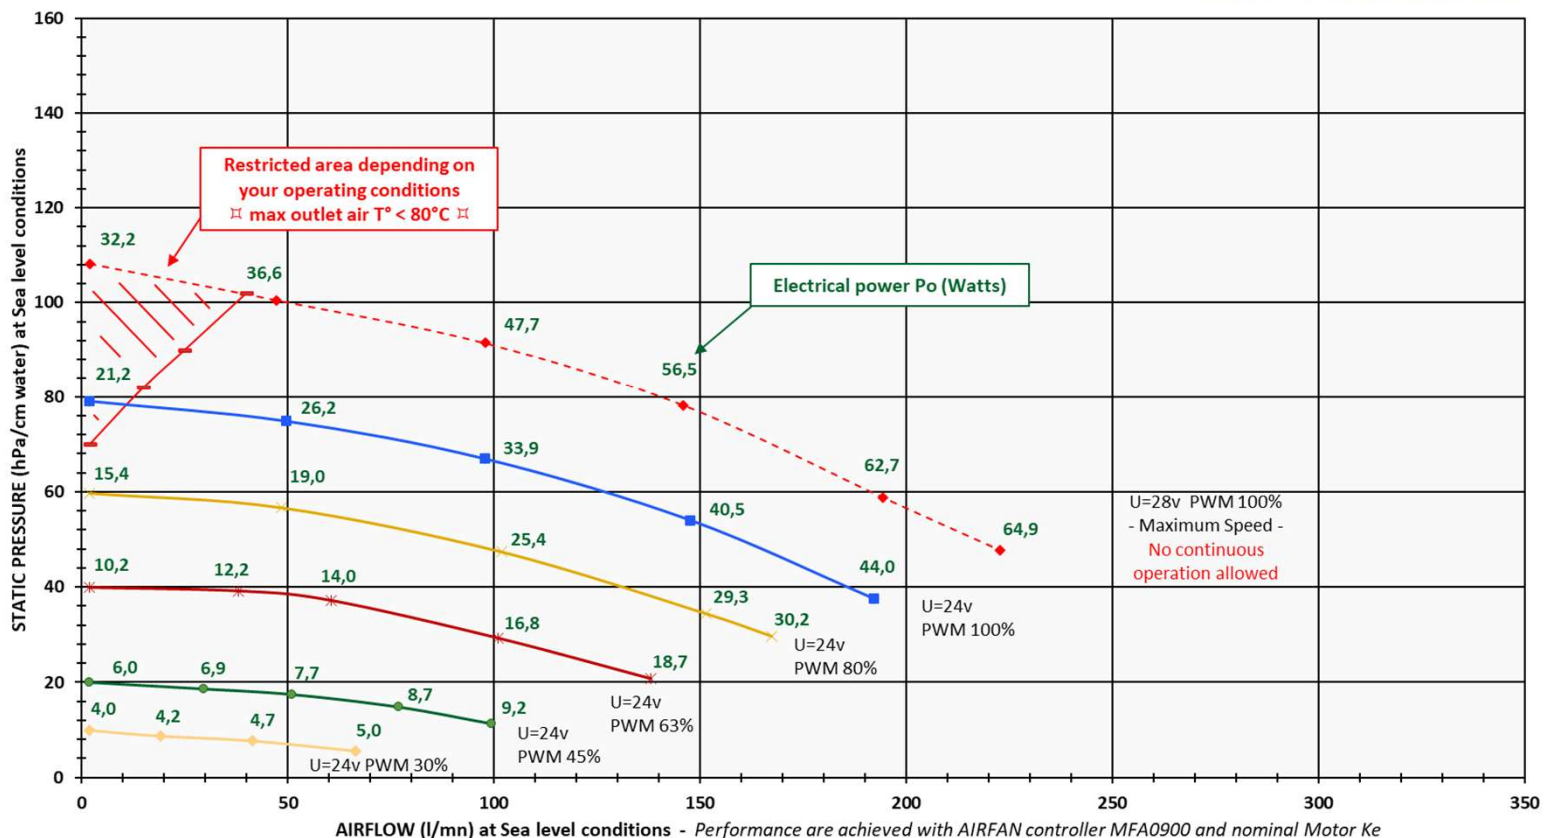

CUSTOMISATION



Outlet port

- ☒ Outlet port male or female connector (22Ø ISO5356-1) or additional auxiliary ports



- ☒ O-ring for air inlet
- ☒ Custom label



- ☒ Wire Length 150 or custom



CUSTOMISE TO YOUR SPECIFICATIONS



All values listed are typical values with tolerance classification grade 4 according to standard ISO 13348

