


MFA0295

Blower for Performance & High reliability

A standard AIRFAN blower's architecture with its unique soundproofing housing. The **MFA0295** is perfectly suited for implementation in ventilators dedicated to Acute, Sub-Acute and Home Care. The **MFA0295** is derived from **MFA0290** without inner motor cooling system for Oxygen management**.

New product

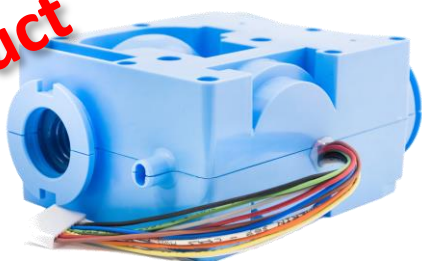

PERFORMANCES


ΔP max @24V		77 hPa	fully closed
Q max @24V		290 l/mn	fully opened
Typical w/p @30 l/mn		P = 10.5 (W)	@30 hPa
		P = 21.5 (W)	@60 hPa
LifeTime (L10)		> 25 000 hours*	
Type		Casing integration	

* LifeTime expectancy based on standard operating conditions

	Dynamic transient time*	< 95 ms	@3A max
		< 88 ms	@6A max
		< 84 ms	@10A max
* from 5 to 60 hPa @30 l/mn			
	Noise Level*	< 29 dBa	@10 hPa
		< 41 dBa	@30 hPa
		< 48 dBa	@60 hPa

* with Blower inlet @1m

air inlet
with O₂

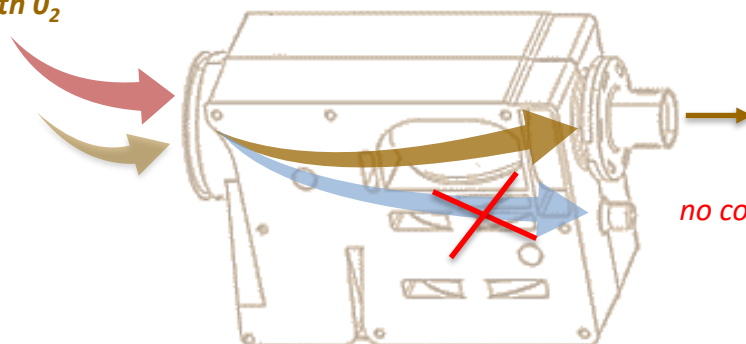


flow to patient
with blended O₂

no cooling

TECHNICAL DATA

Voltage supply	24 VDC (nom) 28 VDC (max)
Motor type	Brushless with Hall-effect sensors
Dimensions (casing)	130 x 100 x 61 mm (5.3 x 3.9 x 2.4 in)
Weight	0.45 kg (~ 1.00 Lb)
Integration	works in any position/orientation
Temperature	-20 to +50°C ambient
Humidity	0 to 95% RH non condensing
Atmospheric pressure	700 to 1100 hPa
Oxygen compatibility	depending on customer operating conditions

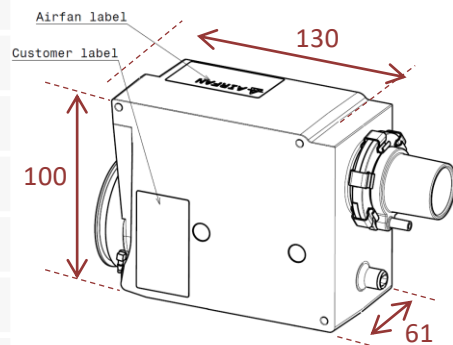


COMPRESSOR MAP


Static ΔP vs Airflow at Constant PWM and Motor Voltage

PWM = Pulse Width Modulation

MFA0295 Turbine

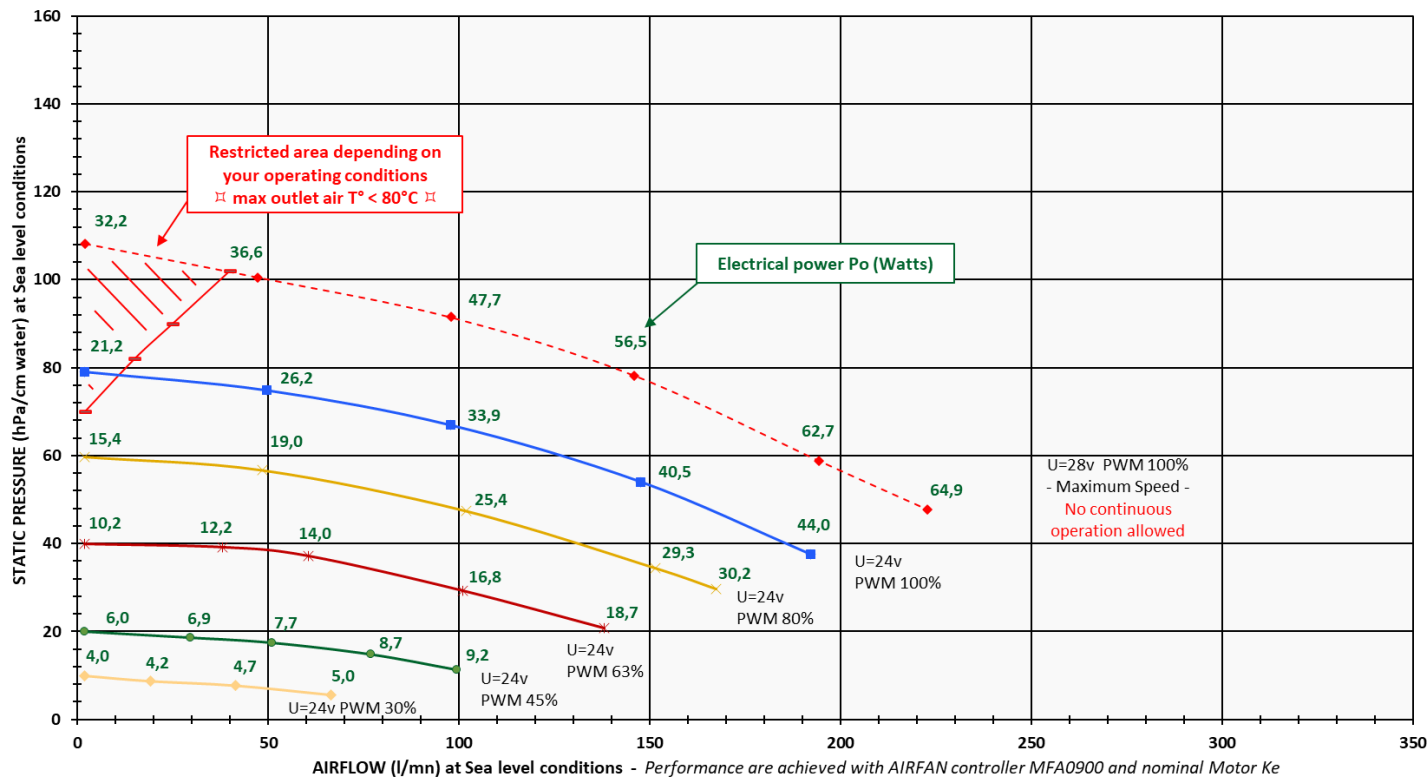

CUSTOMIZATION



Outlet port

- Outlet port male or female connector (22 \varnothing ISO5356-1) or additional auxiliary ports



- O-ring for air inlet
- Custom label



- Wire Length 150 or custom



ASK FOR YOUR CUSTOMIZATION

